

# USER'S MANUAL

## **LED Wash 7x18W RGBWA+UV**



### **1-Maintenance**

- 1.Please keep the light in dryness and avoiding use in wet place.**
- 2.Using intermittently can be extended the life.**
- 3.Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.**
- 4.Please do not wipe the crust using organic menstrume for avoid to damaged the product.**

### **2-Statement**

**The product has well capability and intact packing when leave factory,All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee,and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change**

### **3-Attention Item**


- 1.For guarantee the life of product,please do not put it on the wet place and not use it the place over 40 degree.**
- 2.Please don't lay the product on the un-fixable or shakable place.**
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.**
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the**

- life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

**4-Display Control Instruction**

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.

- A:Function
- B:Up
- C:Down
- D:Enter
- E:LED Display

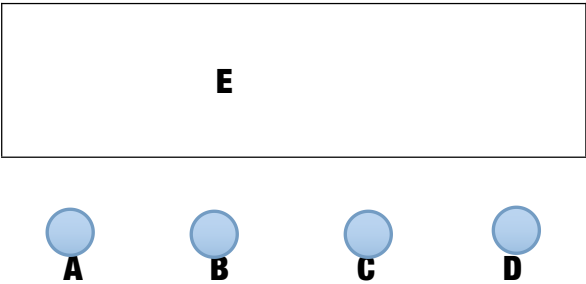

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

**5-Product Introduction**

Power consumption:126W  
Fixing lamp:LED 7×18W RGBWA UV  
DMX Control channels:10/15 DMX Channels  
Shuttle:Flash rate:0--10HZ

Power Supply:AC90--275V,50--60HZ  
Dimmer:0-100% mechanic dimmer  
Long Lifespan LED  
(more than 60,000 hours)

| <b>DMX Channel Summary-10 Channels Mode</b> |         |   |
|---|---------|---|
| Channel                                     | Value   | Function                                    |
| CH1   | 0-255   | X-axis, move                                |
| CH2   | 0-255   | Y-axis, move                                |
| CH3   | 0-134   | Total dimmer, linear dimming-Dark to Bright |
|   | 135-239 | Strobe,Slow to Fast                         |
|   | 240-255 | Full light                                  |
| CH4   | 0-255   | Red light color control                     |
| CH5   | 0-255   | Green color control                         |
| CH6   | 0-255   | Blue light color control                    |
| CH7   | 0-255   | White light color control                   |
| CH8   | 0-255   | Amber light color control                   |
| CH9   | 0-255   | Violet light color control                  |
| CH10  | 0-255   | X/Y-axis ,Slow to Fast                      |

| <b>DMX Channel Summary-15 Channels Mode</b> |         |   |
|---|---------|---|
| Channel                                     | Value   | Function                                    |
| CH1   | 0-255   | X-axis, move                                |
| CH2   | 0-255   | X-axis,Fine-tuning                          |
| CH3   | 0-255   | Y-axis, move                                |
| CH4   | 0-255   | Y-axis,Fine-tuning                          |
| CH5   | 0-255   | axis ,Slow to Fast                          |
| CH6   | 0-134   | Total dimmer, linear dimming-Dark to Bright |
|   | 135-239 | Strobe,Slow to Fast                         |
|   | 240-255 | Full light                                  |
| CH7   | 0-255   | Red light color control                     |
| CH8   | 0-255   | Green color control                         |
| CH9   | 0-255   | Blue light color control                    |
| CH10  | 0-255   | White light color control                   |
| CH11  | 0-255   | Amber light color control                   |
| CH12  | 0-255   | Violet color control                        |
| CH13  | 0-255   | Color selection                             |
|   |         | Color combination                           |
|   |         | Color jump                                  |
| CH14  | 0-255   | CH13 Speed                                  |
| CH15  | 0-255   | Motor Mode Speed (CH6 color auto run)       |

| Display Control Instruction |           |                                 |
|-----------------------------|-----------|---------------------------------|
| No                          | Display   | Function                        |
| d00 1                       | 00 1-5 12 | Control platform control        |
| PAFA                        | FASt      | Auto run                        |
|                             | PSLS      | Sound control mode              |
|                             | PSLc      | Standalone mode                 |
|                             | SLAU      | Slave setup                     |
|                             | PSL-SLoU  | Slow self propelled main engine |
| PAn                         | PAn       | X motor forward                 |
|                             | rPAn      | X motor reverse                 |
| t 1L                        | t 1L      | Y motor forward                 |
|                             | rt 1L     | Y motor reverse                 |
| d 15                        | d 15      | Forward display                 |
|                             | rd 15     | Reverse display                 |
| 15ch                        | 15ch      | 15 channel mode                 |
|                             | 10ch      | 10 channel mode                 |
| PAS4                        | PAS4      | 540 degree steering of X motor  |
|                             | PA36      | 360 degree steering of X motor  |
|                             | PA 18     | 180 degree steering of X motor  |
| t 127                       | t 127     | 270 degree steering of Y motor  |
|                             | t 118     | 180 degree steering of X motor  |
|                             | t 109     | 90 degree steering of X motor   |
| rESL                        | rESL      | Reset                           |
| LoAd                        | LoAd      | Initialization parameter        |