# LumiPar 12UQPro

12x8W RGBW/FC wash light super-slim PAR LED







Lumipar 12UQPro is a super-slim par LED designed for professional use to be a powerful wash light and perform an outstanding chromatic capacity through the new optical design and light source based on 4 colours mixing. Lumipar 12UQPro is compatible with the infrared remote controller for intuitive and interactive use without need any external DMX units and can be also controlled wireless through the optional USB WIFI transceiver in combination with WIFIBOX and the SmartColor app.

### **MAIN FEATURES**

- 12x8W RGBW/FC high-power LED
- Superior optical design to ensure advanced chromatic synthesis
- Flicker-free operations
- USB port for USB WIFI transceiver (optional)
- Silent operation and HD dimming system

### **TECHNICAL SPECIFICATION**

#### LIGHT SOURCE

- Source:12x8 W RGBW LEDs
- CCT:W: 6.600
- Luminous flux:2'689 lm
- Lux:2'871 lx @3 m full
- Source life expectancy: > 50.000 h

#### **OPTICS**

- Beam angle:15°
- Lens diameter:31 mm
- Additional optics:15° (included) 25° (optional) 45° (opional)

## **COLOUR SYSTEM**

- Colour mixing: RGBW / FC
- · Colour wheel: virtual colour wheel with macros

### DYNAMIC EFFECTS

- Static mode: selection of static colour
- Manual mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment

### **BODY**

- Body: sturdy die-cast aluminium body
- Body colour: black

# CONTROL

- Protocols: DMX512
- DMX channels:4 / 9 channel
- Wireless Control: optional, proprietary protocol compatible with WIFIBOX, WDBOX
- Display: LED display user interface
- Firmware upgrade: yes, via USB DMX interface (UPBOX1) not included
- IR: infrared sensor controlled by remote
- Master/Slave: for synchronised operation of more units linked in a chain

### **ELECTRONICS**

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves:4 selectable dimming modes available
- Strobe / shutter:1 28 Hz, electronic
- Operating temperature: -10° ~ +45°
- LED Control: flicker free operation

### ELECTRICAL

- Mains power supply: 100-240V 50/60Hz
- Max power consumption:77 W
- Max power consumption (at 120V):78 W
- Output (at 230V):17 units on a single power line
- Output (at 120V):9 units on a single power line

### **PHYSICAL**

- IP rating:44
- IK rating:07
- Cooling: passive cooling and fan-free
- Suspension and fixing: double hanging bracket suitable for safe hanging and for floor positioning
- Data: USB port for USB WIFI transmitter (optional)
- Signal connection: variants available
- Power connection: variants available
- Dimensions (WxHxD):253x200x237 mm
- Weight:3,3 kg

VDE15SEU

LUMIPAR1801BD

### CERTIFICATIONS / APPROVALS

Certifications / Approvals: CE, UKCA, RCM

# **ACCESSORIES & RELATED PRODUCTS**

Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, 9313FCAL03 SETSAC3FCA socket, L.3 m Ass. 3x2.5mm TH07 cable, SHUKO plug, SETSAC3FCA 9333FCAL03 socket, L.3 m 3x2.5mm TH07 Cable, 20A SETSAC3FCA, 20A SETSAC3FCB, L. 3m • 938025L03 Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 C6002B Flight case for 8pcs of FCLUMI8 LUMIPAR12UQPRO/12UH/12UAW/12UQ/SUNPIX24

Steel security cable for hanging bodies, inox steel shackle, RSR0630B

L=60 cm, black

Dmx cable HC5340. CANC3MXX XLR 3p->CANC3FXX XLR TOUR53413L03 (f) 3p, L.3m

Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR TOUR53415L03 (f) 5p, L.3m


 ARCLUMIL25D38 Optic lens 25°, D.38mm ARCLUMIL45D38 Optic lens 45°, D.38mm USB Wi-Fi transreceiver, compatible with WIFIBOX and WIFIUSB **WDBOX** WIFIBOX DMX controller interface, Wi-Fi/DMX IN, Wi-Fi / DMX OUT Wireless DMX Transceiver, IN/OUT 3-pin XLR, distance WDBOX 200m, 2.4 GHz, 0.6 kg RGBWA IR remote controller, manual / auto modes, for LUMIPARIRCH LUMIPAR IR series Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB UPBOX1U

Power cable VDE socket, Shuko plug


Barn door 4 directional flaps to adjust the light beam, f.




PRESET FULL ON Beam angle 50%: 16,8°

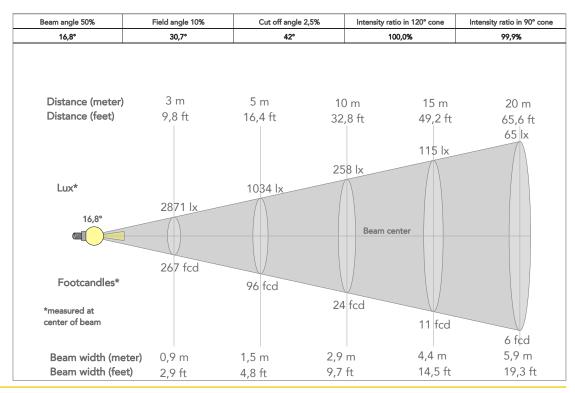

# **TECHICAL DRAWINGS**







# **CERTIFICATIONS / APPROVALS**







Via A. Olivetti, snc 04026 - Minturno (LT) ITALY info@prolights.it Tel: +39 0771 72190

prolights.it VAT No. IT 02057590594